



Product information

REV202111

Stuffing-Box-Packing Type 2127

Description

Diagonally braided from synthetic fibre, impregnated throughout with PTFE-dispersion, lubricated with silicone oil.

Properties

Style 2127 is a dense, yet soft and pliable packing . The combination of the synthetic fibres, the PTFE-impregnation and the high-temperature break-in lubricant results in a packing with very low shaft wear and outstanding durability.

Application areas

Multi-purpose packing which can be used in pumps, mixers, kneaders and valves in the chemical, pharmaceutical, pulp- and paper and food industry.

Application media


TEADIT style 2127 covers a wide variety of media like water, steam, diluted acids and lyes, most chemicals, gases, etc.

Not suitable for

Concentrated acids and lyes, oxygen, lacquers and paint.

Benefits

Excellent all-round packing for many applications within a plant.
Non contaminating, not shaft scouring.

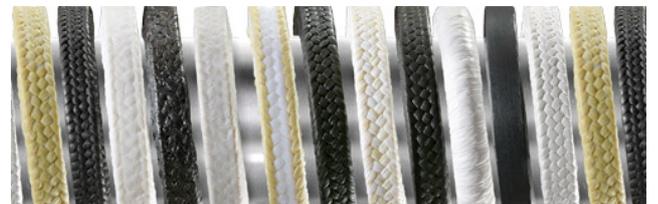

Temperature:

- temp + temp
(°C) 100 230

Pressure:

rotating: reciprocating: static:
(bar) 20 80 100

pH: 2-12 density: (g/cm³) 1,35 v: (m/s) 12

Disclaimer

Please note, failure to select the correct materials or products we supply ("the Products") may result in damage to plant, equipment or property. In some instances, it may cause death or personal injury. We are not designers and do not give advice about design related matters concerning the Products. We can help and assist with the technical specifications for the Products. In specific applications, particularly where critical conditions exist, we will try to assist you within the limitations of the services that we offer. All information supplied by us is intended as technical co-operation outlining the specifications of the different Products which we supply. To the extent permitted in law, no warranty is given in respect of any information supplied by us. The customer must satisfy themselves as to the suitability of the Products for their intended application and use. The correct fitting of Products is the responsibility of the customer. Your statutory rights remain unaffected. Save in respect of death, personal injury or fraud, our entire liability to you, however arising from the supply of Products shall be limited to the £10M indemnity amount provided by our insurers.

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever. Please note: the color of the actual product might vary from the above image on this data-sheet.